



This diagram shows an exploded perspective view of a mechanical assembly. The main component is a long, thin arm (200) with a curved end (209) and a mounting bracket (212) at the other end. A pivot pin (213) is shown at the end of the arm. A triangular piece (203) is positioned near the pivot. A small rectangular piece (216) is also shown. A larger, more complex component (201) is shown above the arm, featuring a circular feature (211), a rectangular slot (205), and a cylindrical protrusion (204). A small cylindrical piece (202) is shown near the pivot. A circular component (206) is shown to the left of the arm, and a circular component (207) is shown above the arm. A small rectangular piece (214) is shown near the pivot. A dashed line indicates the assembly path for component 206 into the arm.


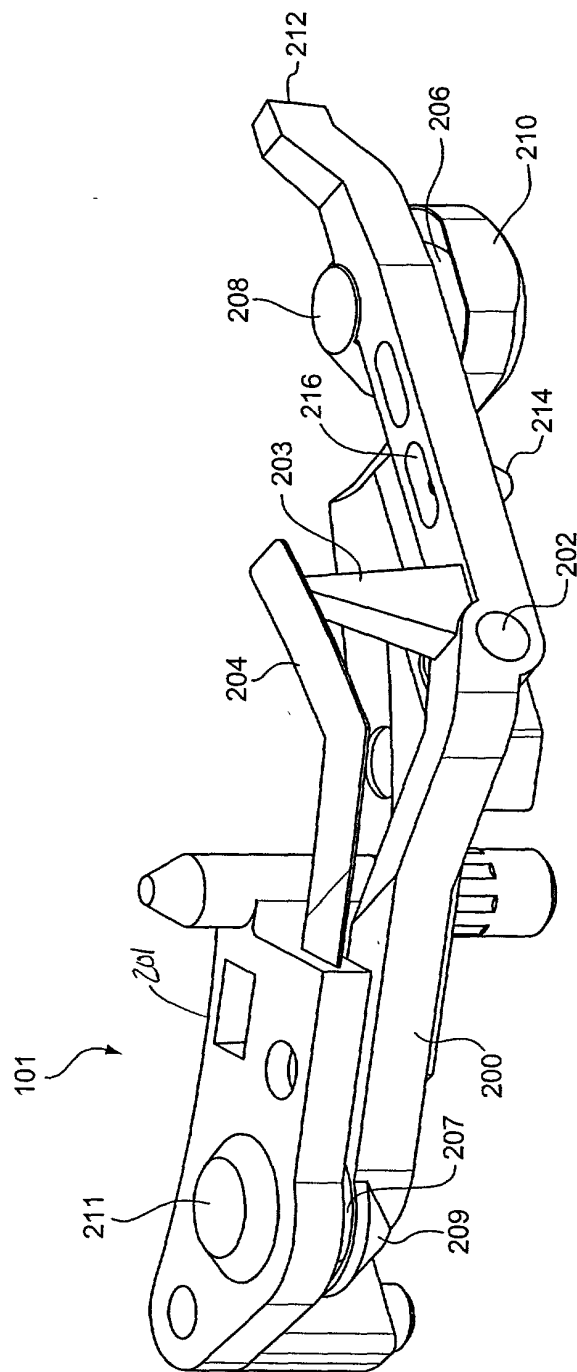


FIG. 3

FIG. 4

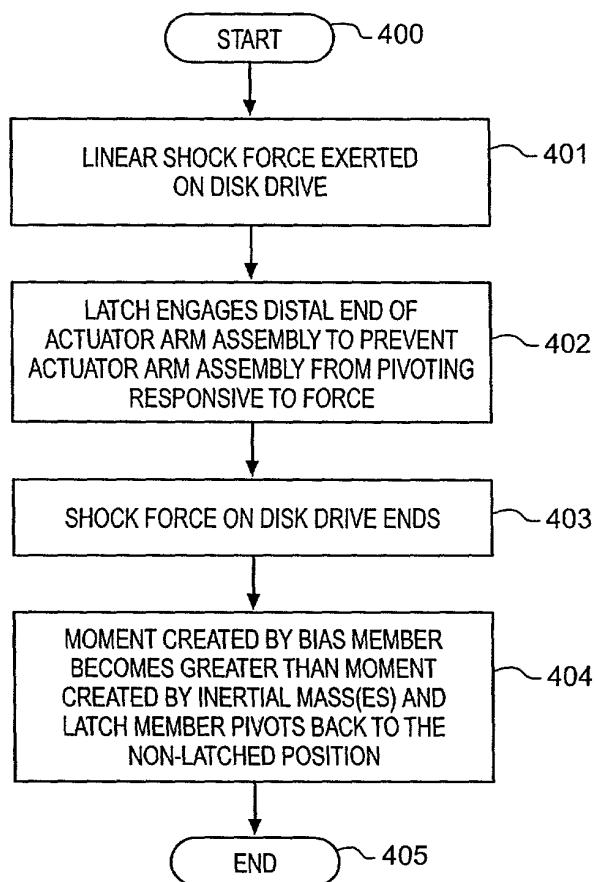

20221019 09:45:07

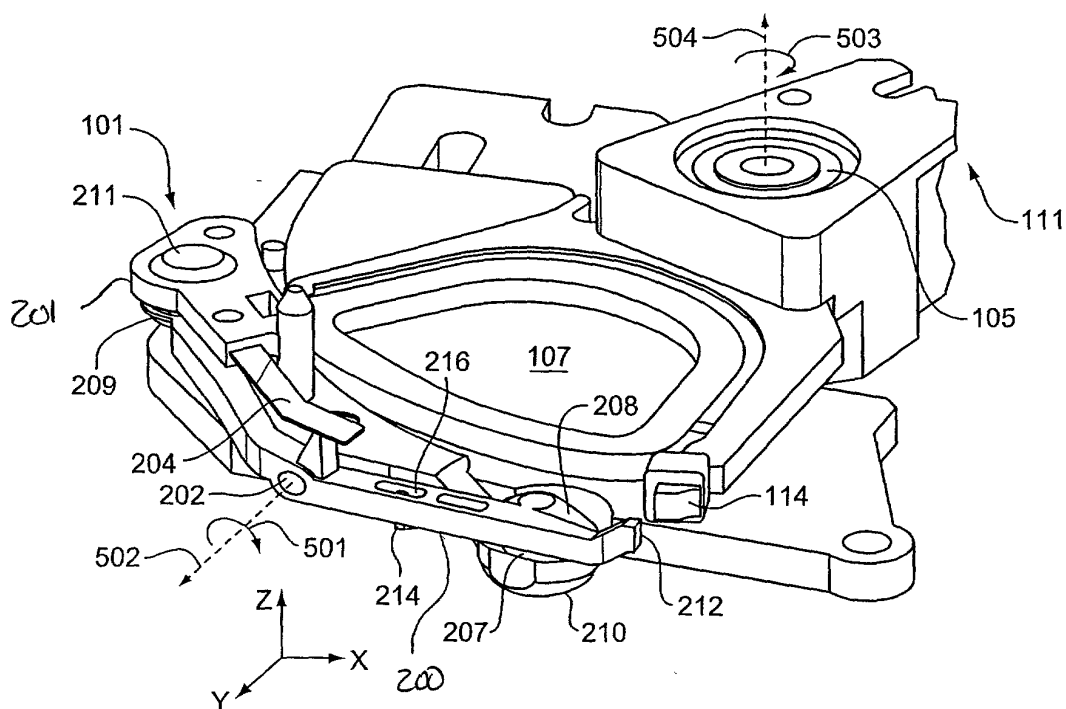


FIG. 5

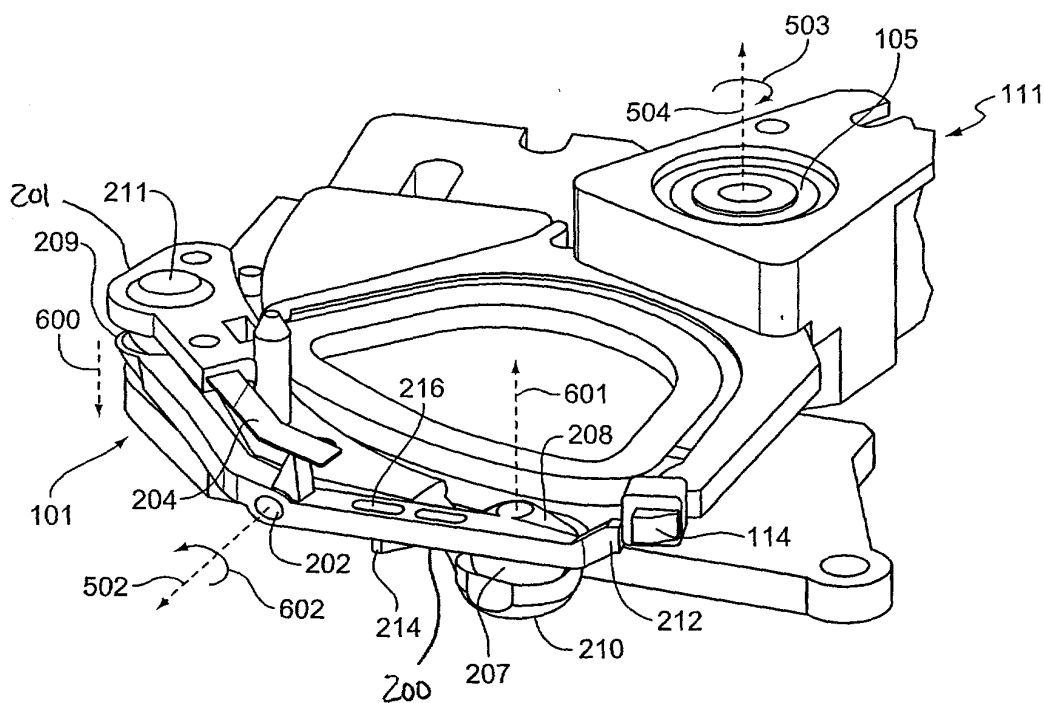


FIG. 6A


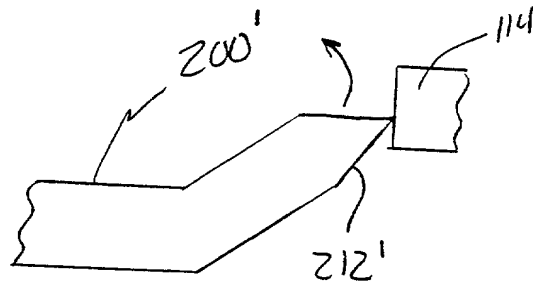


FIG. 6B

10054376.012209

FIG. 7

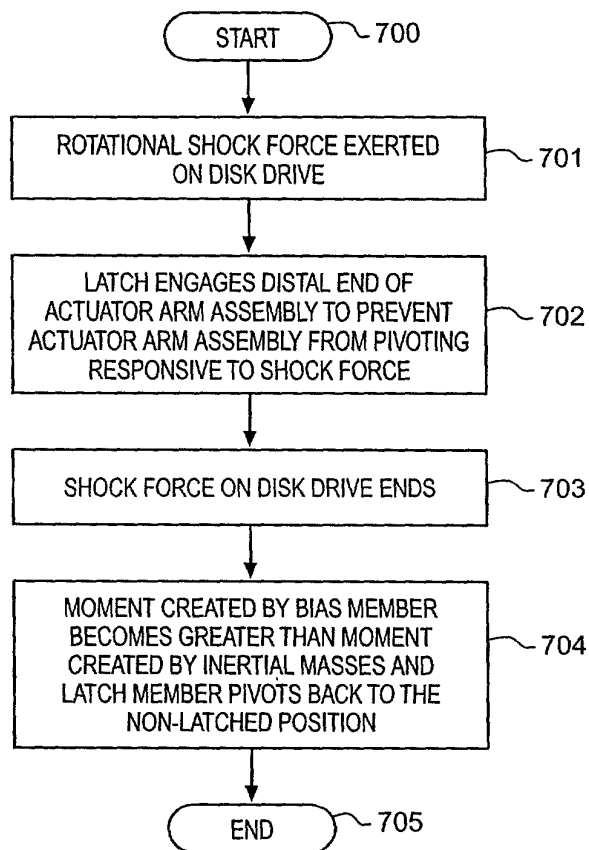

10054376.012202

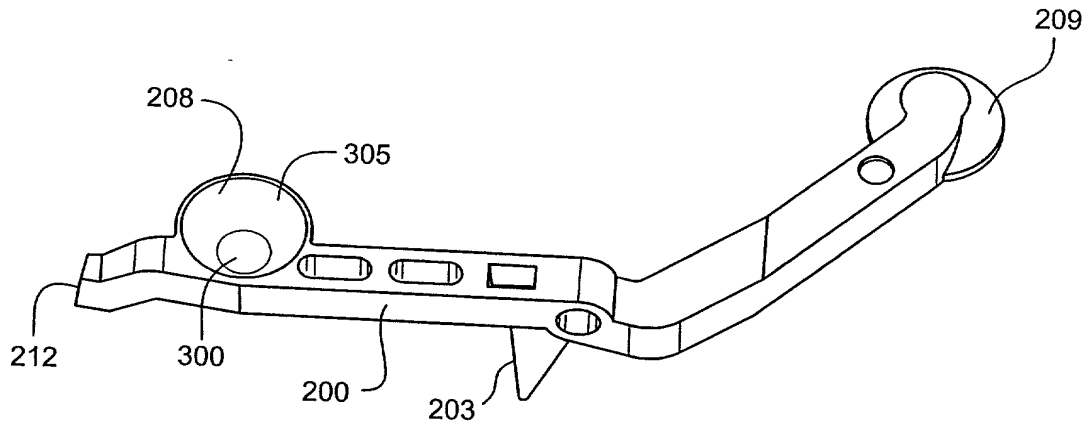


FIG. 8

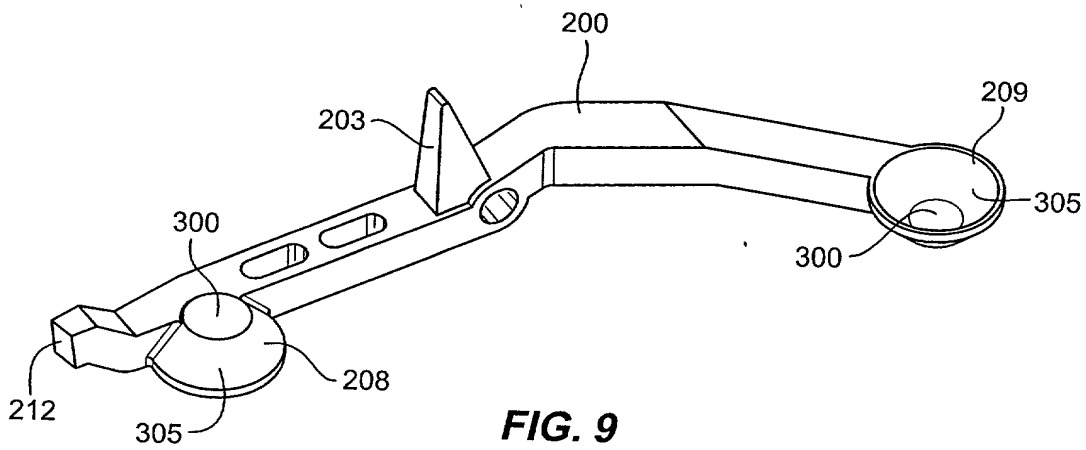


FIG. 9

1054376-012003

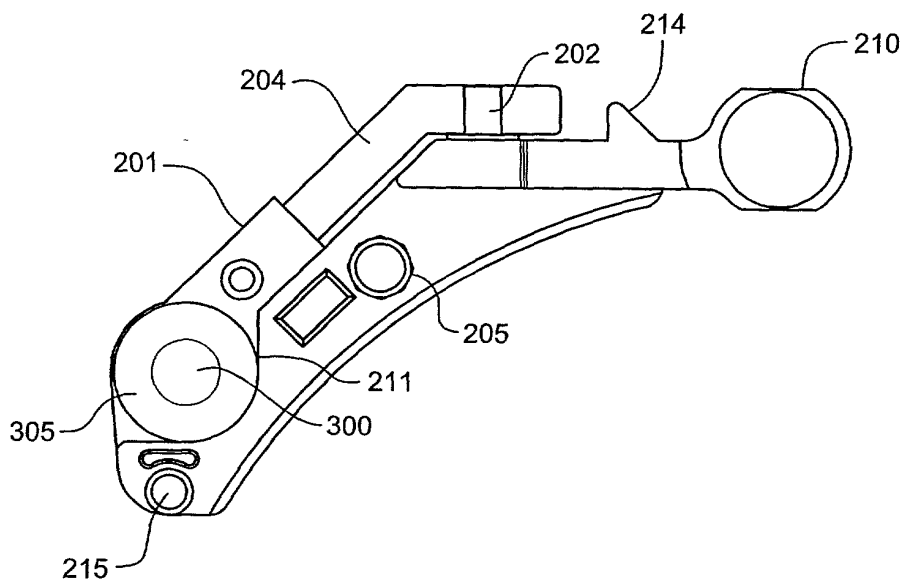


FIG. 10




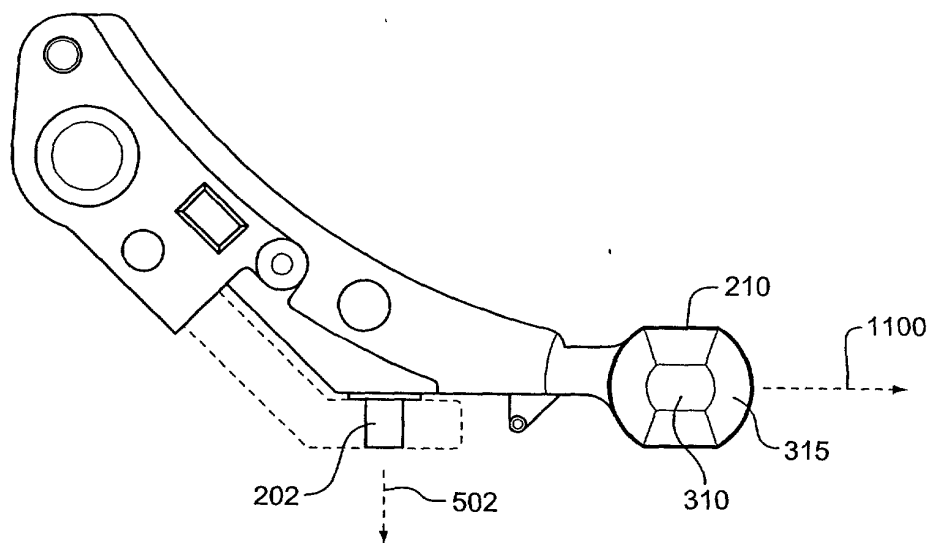


FIG. 11

1054376.012202

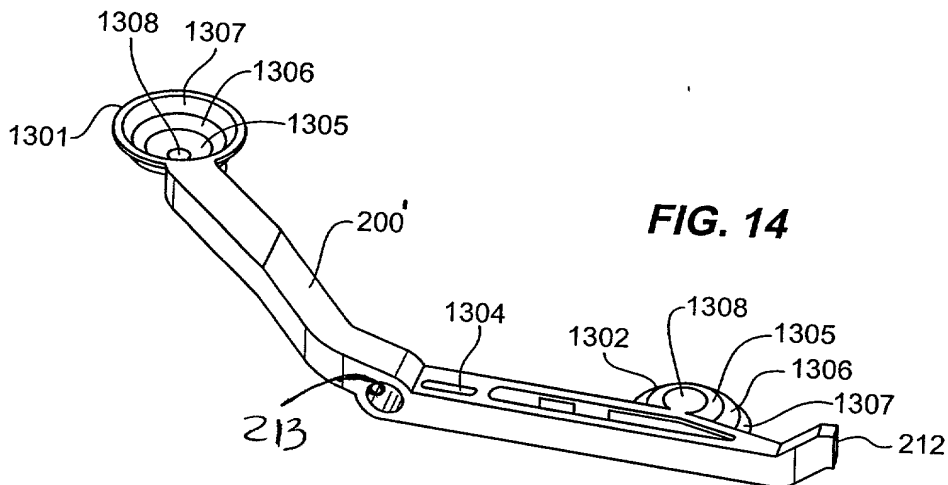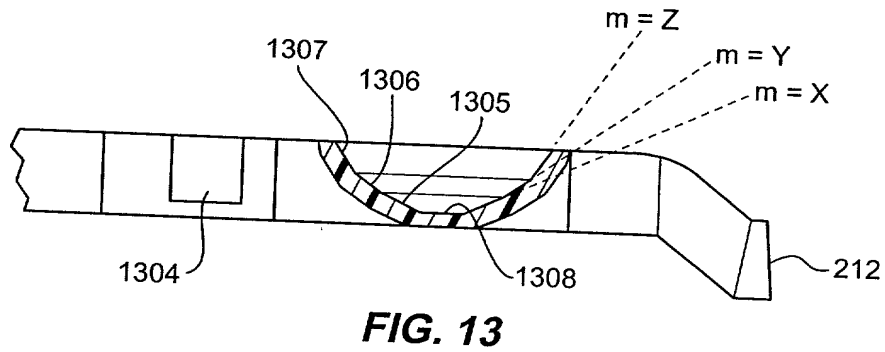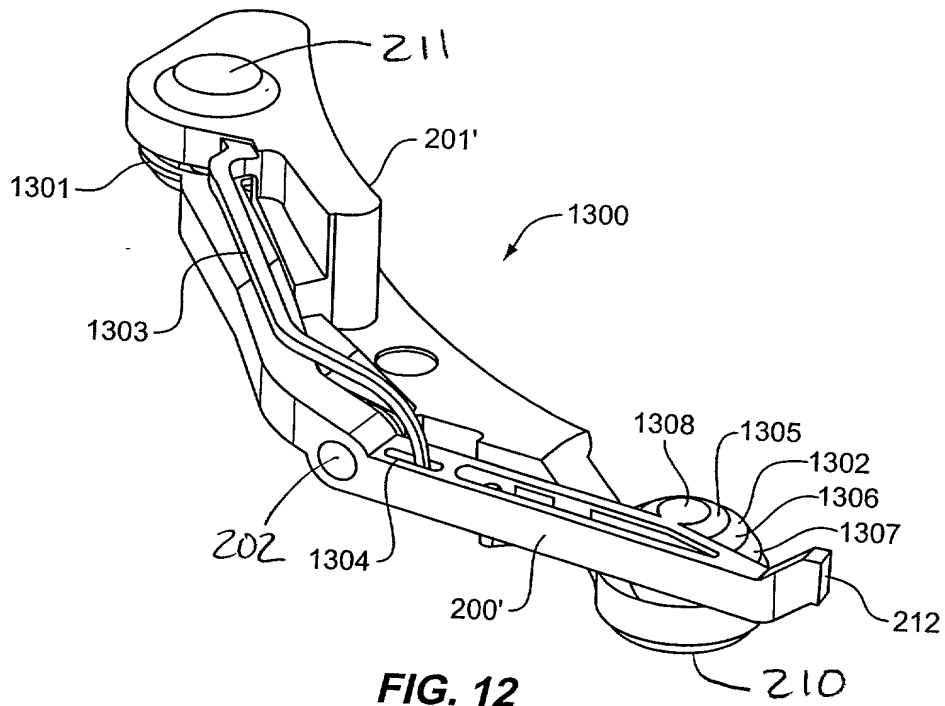

202210" 94E4500F